

SM-255PC8

60 cell-series
Polycrystalline PV Module

S-ENERGY

240 ~ 255 Watt

New story creator, S-Energy


As the first company for PV industry in Korea, S-Energy has always been marking its name in every milestone of Korean PV history. Since 1992, we have been manufacturing PV modules and providing system integration service to our customers, and now we are proud to boast our worldwide recognition based on unbeatable quality standards and reliability. S-Energy's PC8 series is designed with our accumulated experience and cutting edge technology, and it will be the perfect choice for you which can be used in any environment and any installation conditions.

Features



Positive tolerance

0~+5W positive power sorting



Mechanical load

8,400 Pa (857kg/m²)
(IEC Standards: 245kg/m²)



Hail impact test

30.7m/s speed ball
(IEC Standards: 23m/s)



Ammonia corrosion resistance test

Applicable in agricultural
and stock breeding environment



Salt mist corrosion test

Applicable in marine environment



Linear warranty

Max annual power decline 0.7%



Qualifications & Certifications

IEC 61215 & 61730, CE, UL1703, MCS,
ISO 9001, ISO 14001, OHSAS 18001, PV Cycle



Mechanical Characteristics

Solar cell	Polycrystalline 156mm x 156mm (6 inches)
No. of cells	60 cells 6 x 10 matrix
Dimensions	1665mm x 999mm x 50mm
Weight	20 kg (44.09 lbs)
Front glass	3.2mm High-transmittance low iron tempered glass
Frame	Anodized aluminum silver frame Option : black color / rail type
Output cables	RHW-2, 12AWG (4mm ²) / Cable length:1000mm
Connectors	MC4 connectable

Warranty


Product warranty	10 years limited product warranty
Performance warranty	1 st year minimum peak power output : 97%
	2 nd year to 24 th year peak power output : max annual power decline 0.7%
	25 years peak power output : 80.2%

SM-255PC8 60 cell-series

Polycrystalline PV Module

Electrical Characteristics

STC (Irradiance 1000W/m ² , module temperature 25°C, AM=1.5)	SM-240PC8	SM-245PC8	SM-250PC8	SM-255PC8
Rated power (P _{max})	240W	245W	250W	255W
Voltage at P _{max} (V _{mp})	30.0V	30.4V	30.8V	30.8V
Current at P _{max} (I _{mp})	8.02A	8.08A	8.14A	8.28A
Warranted minimum P _{max}	240W	245W	250W	255W
Short-circuit current (I _{sc})	8.58A	8.63A	8.67A	8.82A
Open-circuit voltage (V _{oc})	37.3V	37.4V	37.5V	37.9V
Module efficiency	14.42%	14.72%	15.03%	15.33%
Operating module temperature	-40 °C to + 85 °C			
Maximum system voltage	600VDC (UL) / 1000VDC (IEC)			
Maximum series fuse rating	15A			
Maximum reverse current	20.25A			
Power tolerance	0 ~ +5 W			

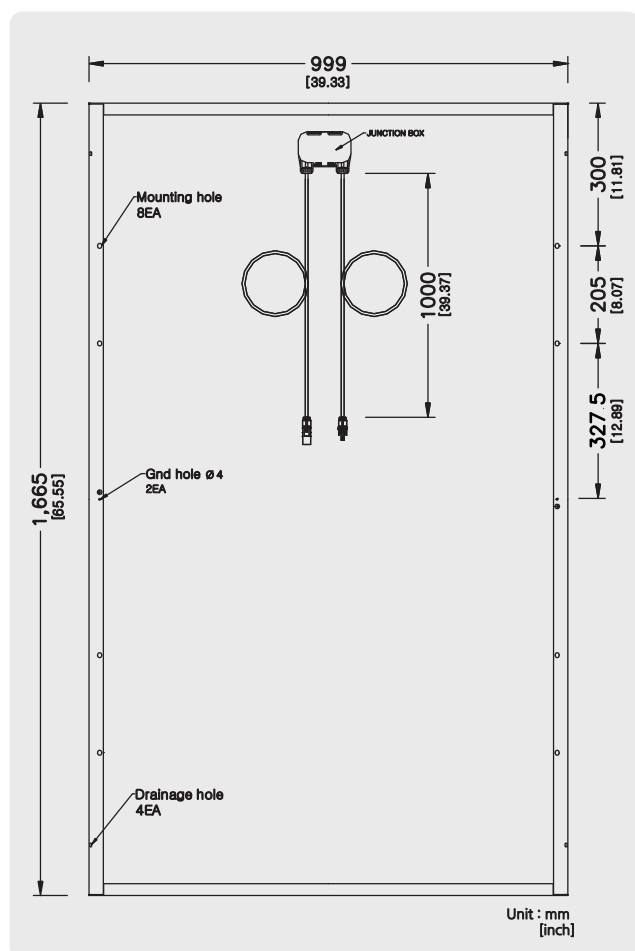


Temperature Characteristics

Temperature coefficient of I _{sc}	0.052%/°C
Temperature coefficient of V _{oc}	-0.312%/°C
Temperature coefficient of power	-0.429%/°C
NOCT (Air 20 °C; Sun 0.8kW/m ² ; Wind 1m/s)	45±3 °C

Packing Configuration

Container	40' H/C
Modules per pallet	20 pcs
Pallets per container	26 pallets
Modules per container	520 pcs

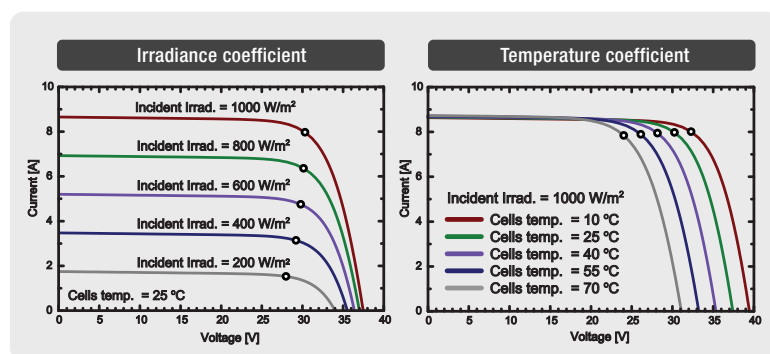

Remarks :

P_{max} measurement tolerance : ±3%
 S-Energy uses triple A class simulator.
 Specification subject to change without prior notice. S-Energy reserves the rights of final interpretation.
 Document : SE-Datasheet_255PC8_60-2013-V01

S-Energy Co., Ltd.

Address. 3rd Fl., Miraeasset Tower, 685, Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do 463-400, Republic of KOREA
 Tel. +82-70-4339-7100 Fax. +82-70-4339-7199 E-mail. inquiry@s-energy.com

S-Energy Europe GmbH

Address. Ludwig-Erhard-Str. 30-34 65760 Eschborn, Germany
 Tel. +49-6196-9540-111~3 Fax. +49-6196-9985-778 E-mail. info.europe@s-energy.com

SEAI America, Inc.(dba S-Energy America)

Address. 18881 Von Karman Ave, Suite 760 Irvine, CA 92612, U.S.A
 Tel. +1-949-281-7897 Fax. +1-949-281-7893 E-mail. bizdev@s-energy.com